


IN-CEILING MOUNT-10 ACCESSORIES

Berner's Intelliswitch™ Standard On All In-Ceiling Mount-10 Units.

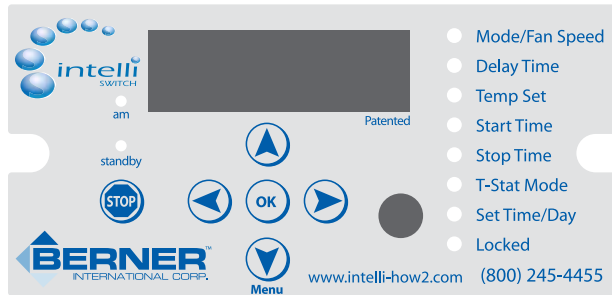

Berner's Intelliswitch™ Includes:

- ◆ Three speeds maintained +/- 5 rpm, utilizes feedback
- ◆ Full speed start
- ◆ LED clock display
- ◆ Low voltage output for door switch activation
- ◆ Master/Slave connection ready
- ◆ Built-in 6' Thermostat Probe, provision for additional remote mounted external thermostat
- ◆ Commercial grade components with operating range: 0° - 70° C or 32° - 158° F
- ◆ Backwards compatible for field installation on existing In-Ceiling Mount air curtains
- ◆ RoHS compliant

Optional Features:

- ◆ Infra-red remote control
- ◆ Remote mountable display/interface

DESCRIPTION	PART NO.
ELECTRICAL ACCESSORIES	
Door Switch Magnetic Reed	9503MRS1F2-NC-K
Handheld Infrared Remote Control (Batteries Included)	33G000RC-2
Remote Mounted Display With 20' Maximum Cable	33G020RDK-2
Serial Connection Cable For Master/Slave Control (specify length required for each unit connection)	505SC***INT485-A ***specify length (020=20')
Thermostat 2-Pole Remote Mounted "For sensing temperature beyond area of built-in thermostat probe"	9502DS2T-P
Locking Cover For Thermostat	95022E999
Toggle Disconnects Remote Mounted	
30 amp 120-240V, 1Ø (2 hp max)	95083032C
30 amp 208-600V, 1Ø (2 hp max) or 3Ø	95081389C
40 amp 120-600V, 1Ø (2 hp max) or 3Ø	950840003C
60 amp 208-600V, 3Ø	950860303C
Toggle Disconnects Factory Installed	
30 amp 120-240V, 1Ø (2 hp max)	95083032C-BI
30 amp 208-600V, 1Ø (2 hp max) or 3Ø	95081389C-BI
40 amp 120-600V, 1Ø (2 hp max) or 3Ø	950840003C-BI
60 amp 208-600V, 3Ø	950860303C-BI